


– because the world is a tough place

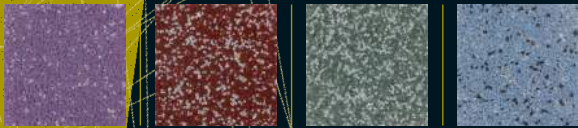


Acrylicon System


Colour Options

Acrylicon **Décor** System

D1
Light grey

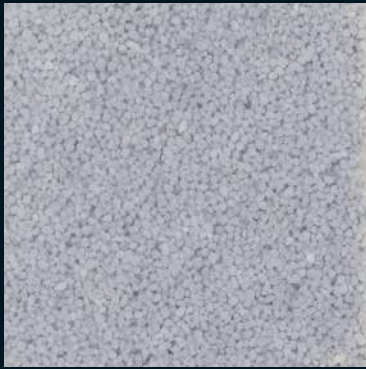

D2
Pebble

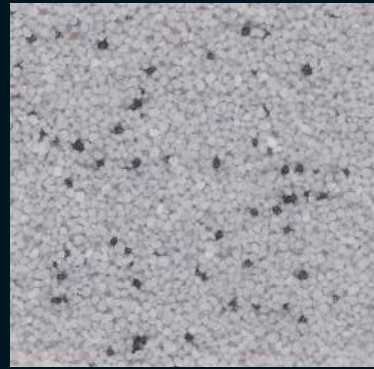


D3
Platinum grey




D4
Emerald




D5
Cobalt blue

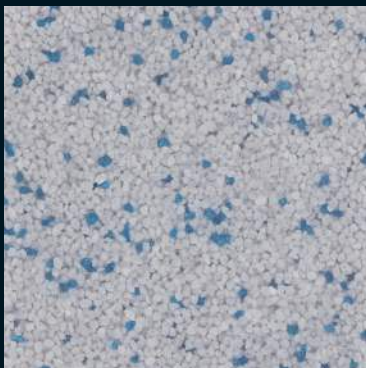

D6
Gentian blue

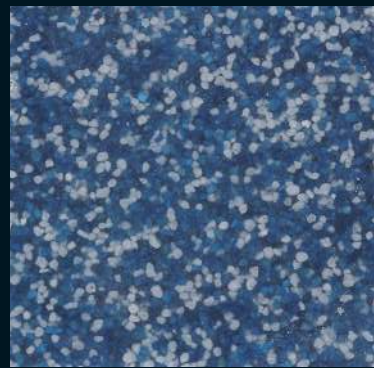

D7
Burnt ginger

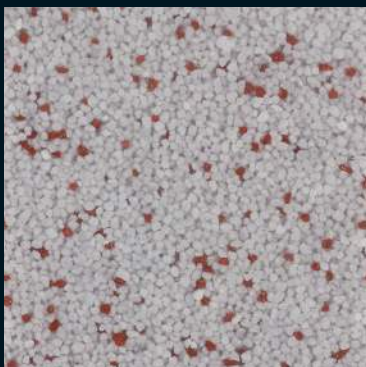

D9
Sandstone yellow




We've made every effort to make the colours in this chart match those that will appear in your finished floor. However, due to the nature of the printing process, we cannot guarantee an exact colour match.

D11
Yellow ochre




D12
Fired kiln

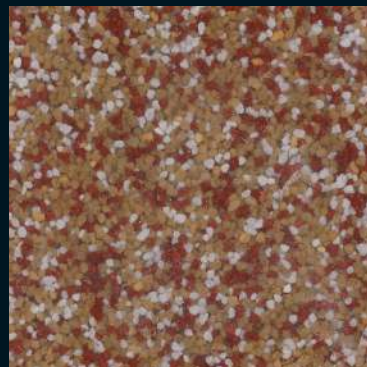

D13
Emperor gold




D14
Oxide red

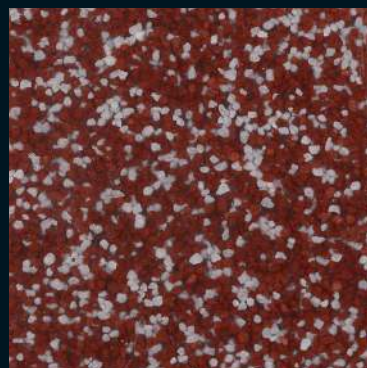

D16
Nut brown




D19
Olive green

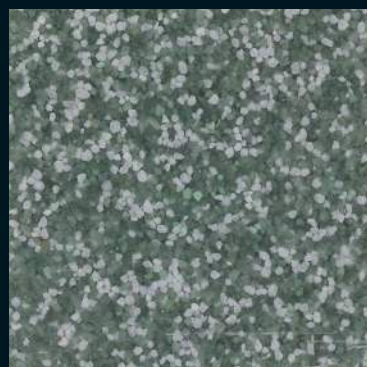


D20
Glacier green




D21
Light blue

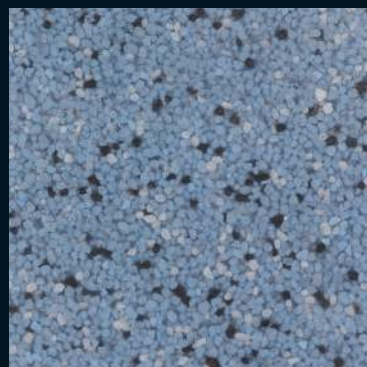

D22
Traffic red

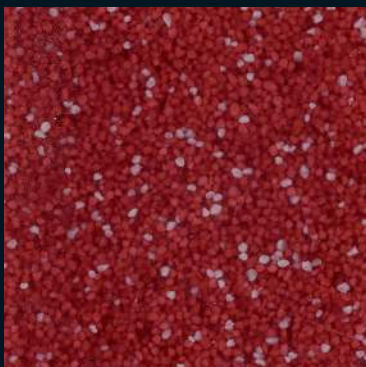

D23
Purple

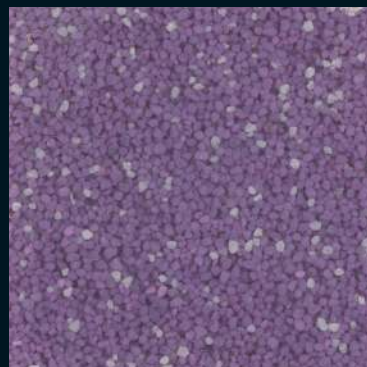

Acrylicon **Variant** System

IV 1
RAL 1002



IV 2
RAL 7031



IV 4
RAL 7001



IV 6
RAL 5002



IV 8
RAL 3011



IV 9
RAL 7023



IV 10
RAL 6021



IV 11
RAL 7032



We've made every effort to make the colours in this chart match those that will appear in your finished floor. However, due to the nature of the printing process, we cannot guarantee an exact colour match.

IV 12
RAL 6002



IV 5
RAL 2011



IV 13
RAL 7035



IV 7
RAL 4005



IV 3
RAL 1004



VF 1 Variant
w/scattered
Flake RAL
7032



We've made every effort to make the colours in this chart match those that will appear in your finished floor. However, due to the nature of the printing process, we cannot guarantee an exact colour match.

Acryliccon **Flake** System

Blend 4




Blend 6




**Blend 9 No
black**




Blend 9

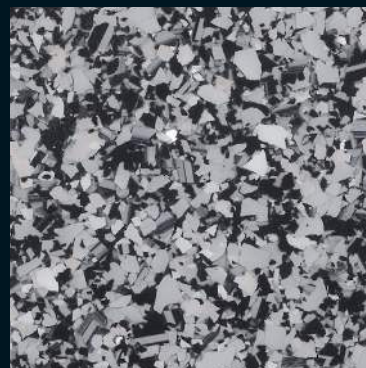

Blend 60

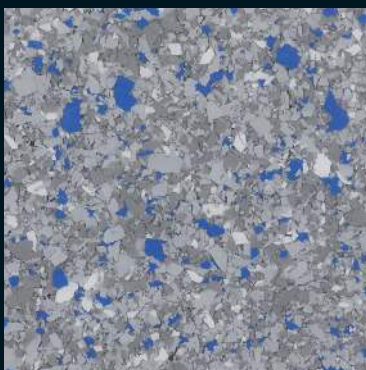

Blend 61

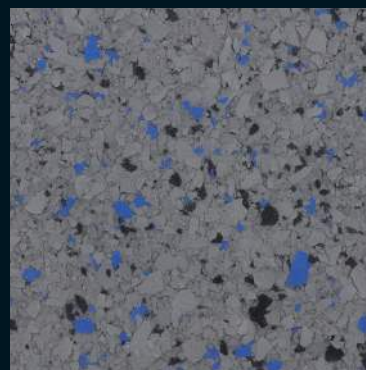

Blend 62



Blend 63



We've made every effort to make the colours in this chart match those that will appear in your finished floor. However, due to the nature of the printing process, we cannot guarantee an exact colour match.

The AcryliCon® Group

The AcryliCon® Group's reputation is based on delivering a superior product whose performance has been proven through its durability, cost-effectiveness, safety, hygienic properties, cleanability, reduced down-time, aesthetic appeal and the ability to meet special and exacting technical and installation criteria.

The AcryliCon® Industrial Flooring System Evaluation

Thorough visual inspection of the current areas, evaluation and preparation of the concrete is required to ensure the longevity of an industrial floor and an optimal bond to the underlying concrete.

Concrete Surface – Quality Requirements

The concrete must be C25 quality or better. The concrete surface must demonstrate sufficient consistency of strength and quality without fine aggregates in the surface (i.e. latency). The surface must be homogeneous, free from loose particles and dirt, and free of oil and dust, before the installation of the floor may commence. The moisture in the subfloor must be no more than 5% by weight and no moisture migration from the ground must occur. AcryliCon must be informed of your subfloor specifications, in particular if the floor is treated with chemicals or contains additives, which may affect the curing process and installation. The floor and room should have a minimum temperature of +5°C/+41°F and a maximum temperature of +27°C/80°F.

AcryliCon recommends trial applications before installations. On any trial areas, bond testing, substrate cleanliness (contamination), substrate surface hardness, porosity, and moisture condition evaluation should be performed to assure integrity of the substrate preparation effectiveness, coating bond, and finished appearance.

Installation of AcryliCon Industrial Flooring System

The concrete surface must be prepared by removing all laitance and contamination, leaving cracked aggregate. The most common methods of preparation are:

Shot-Blasting: This will provide a clean, consistent low profile that will open the pores of the concrete to allow for a solid bond.

Scarifying: The concrete is always scarified twice. The second scarification should cross 90 degrees to the first to achieve cross-scarification. Scarifying greatly opens the pores of the concrete, and the total surface is increased for optimal penetration of the primer and anchoring into the substrate.

With either method of preparation, the concrete must be thoroughly vacuumed prior to commencing with the primer. During the AcryliCon installation fans will be used to exhaust the acrylic odor. In spite of this, the customer must always consider and take precaution against taint and smell during installation and isolate any products he might have from the installation site.

Upon completion of your AcryliCon System installation, AcryliCon will place a dated and logoed stainless steel plate in the floor. If a customer installs an AcryliCon System with Microban® Antibacterial protection, a core sample may be sent to Microban for verification and certification of the antibacterial protection should this be required.

Post-Installation Information


The technical properties of your AcryliCon Floor are based on DIN/ASTM testing and the results are average values delivered under proper installation procedures and conditions.

The AcryliCon Systems are fully cured two hours after installation and may be actively used by the customer.


The supplier is not liable for possible property changes of the AcryliCon Systems caused by hot water loads at 68°C/155°F and above and/or thermal shock (rapid temperature variations).

AcryliCon has made every effort to make the colours in this chart match those that will appear in your finished floor. However, due to the nature of the printing process, we cannot guarantee an exact colour match.


**Blend 64
Marble 1**

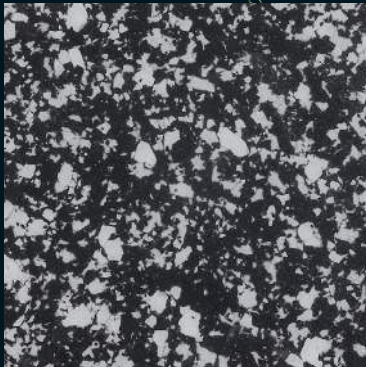

**Blend 65
Marble 2**

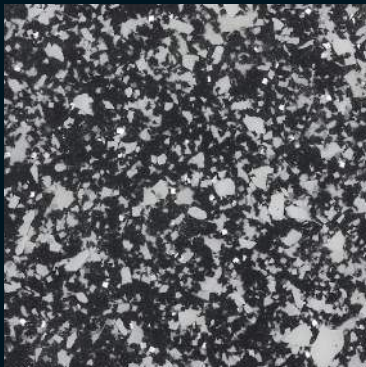


**Blend 66
Marble 3**

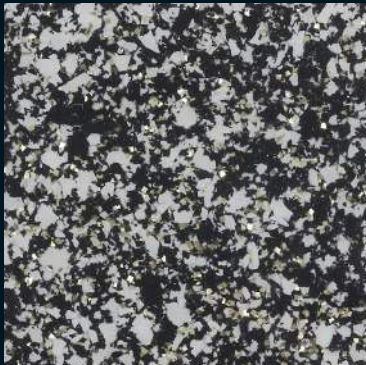

**Blend 67
Marble YL 76**



– because the world is a tough place

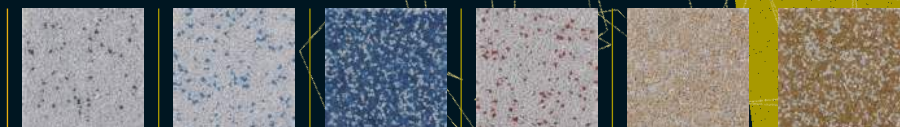

ACRYLICON®
Flooring Solutions

Visit our website www.acrylicon.com for the nearest Acrylicon office

